
given for third-party except with our written permission

be copied, communicated, or

property of HITROL and shall not

is the

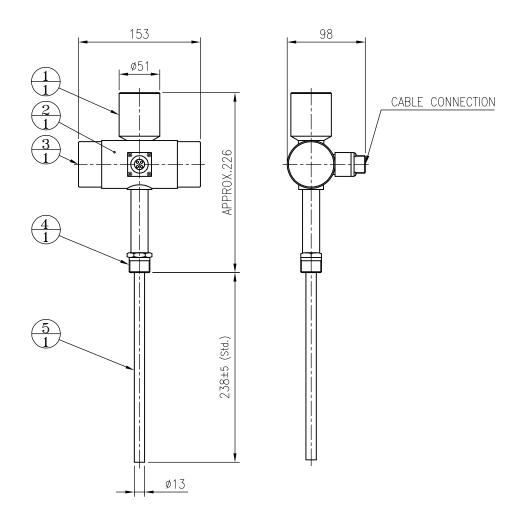

FOR	SEPA	RATE TYPE LEVEL SWITCH				
MOUNTING		TOP & SIDE, S	CREW			
ENCLOSURE		WEATHER PROOF	(IP65)			
AMBIENT TEMP.		−20 ~ +60	.C			
MAX. F	PRESSURE	10	kgf/cm²			
MAX. TEMP		250	°C			
		•				

CABLE CONNECTION SIZE	SHELL 14S
-----------------------	-----------

NO.	DESCRIPTION	MATERIAL	REMARK
1	WEIGHT	C.S	
2	BODY	C.S	
3	COVER	C.S	
4	PROCESS CONN.	304 SS	
5	SENSING ROD	316L SS	

PROCESS	CONN.	SIZE	
PT 3/4"(M)			

TAG. NO.	QT'Y	REMARK
	1	

<u>NOTE</u>

1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED.

										_
4						HITROL CO., LTD.	SCALE	UNIT	SHEET NO.	.∽
<u> 3</u>						HIROL CO., LID.	N.S	mm		gu
<u> 2</u>						TITLE	PROJECT] ·=
Δì						VIBRATION TYPE LEVEL SWITCH				dr.
\triangle	JAN. 2018	1st ISSUE	D Y KIM	B S SUNG	Y H KIM	HTM-930	DRAWING NO.			<u>.</u> 0
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY	HTM930-A-01			-01	H H